

SUPPLIER FOR THE NETHERLANDS, BELGIUM AND LUXEMBOURG



Ditch Witch[®]
Benelux

HYDROLANS



HYDROLANS

The compact Hydrolans is extremely suitable for laying fibreglass pipes, FTTH (Fibre to the Home) projects and gas & water pipes over short distances. The Hydrolans is hydraulically driven and is powered by the external hydraulic function of an excavator. The machine comes standard with three types of lances: **R5**, **R7.5** and **R10**.


Thanks to the quick-release hydraulic couplings, setup is easy.

The Hydrolans is easy to lift via the lifting points, or via the sliding blade of an excavator.

The Hydrolans is CE-certified.

SPECIFICATIONS

- Weight: 650 kg
- Max. operating temperature: 60 °C-
- Max. working pressure: 110 bar
- Max. lance speed: 20 m/min
- Radius 5 to 20 meter
- Pressing force 5 kN
- Pull force 20 kN
- Diameter 48 mm
- Hydraulic specs:
 - Flow rate: 56 l/min
 - Max. pressure: 110 bar
 - Max. static back pressure: 25 bar
 - Max. dynamic back pressure: 40 bar
- Water source:
 - Flow rate: 350 l/min
 - Pressure: 60 bar
- Dimensions lwxhxh: 1450 x 1050 x 1334/1963 mm
- CE-certified

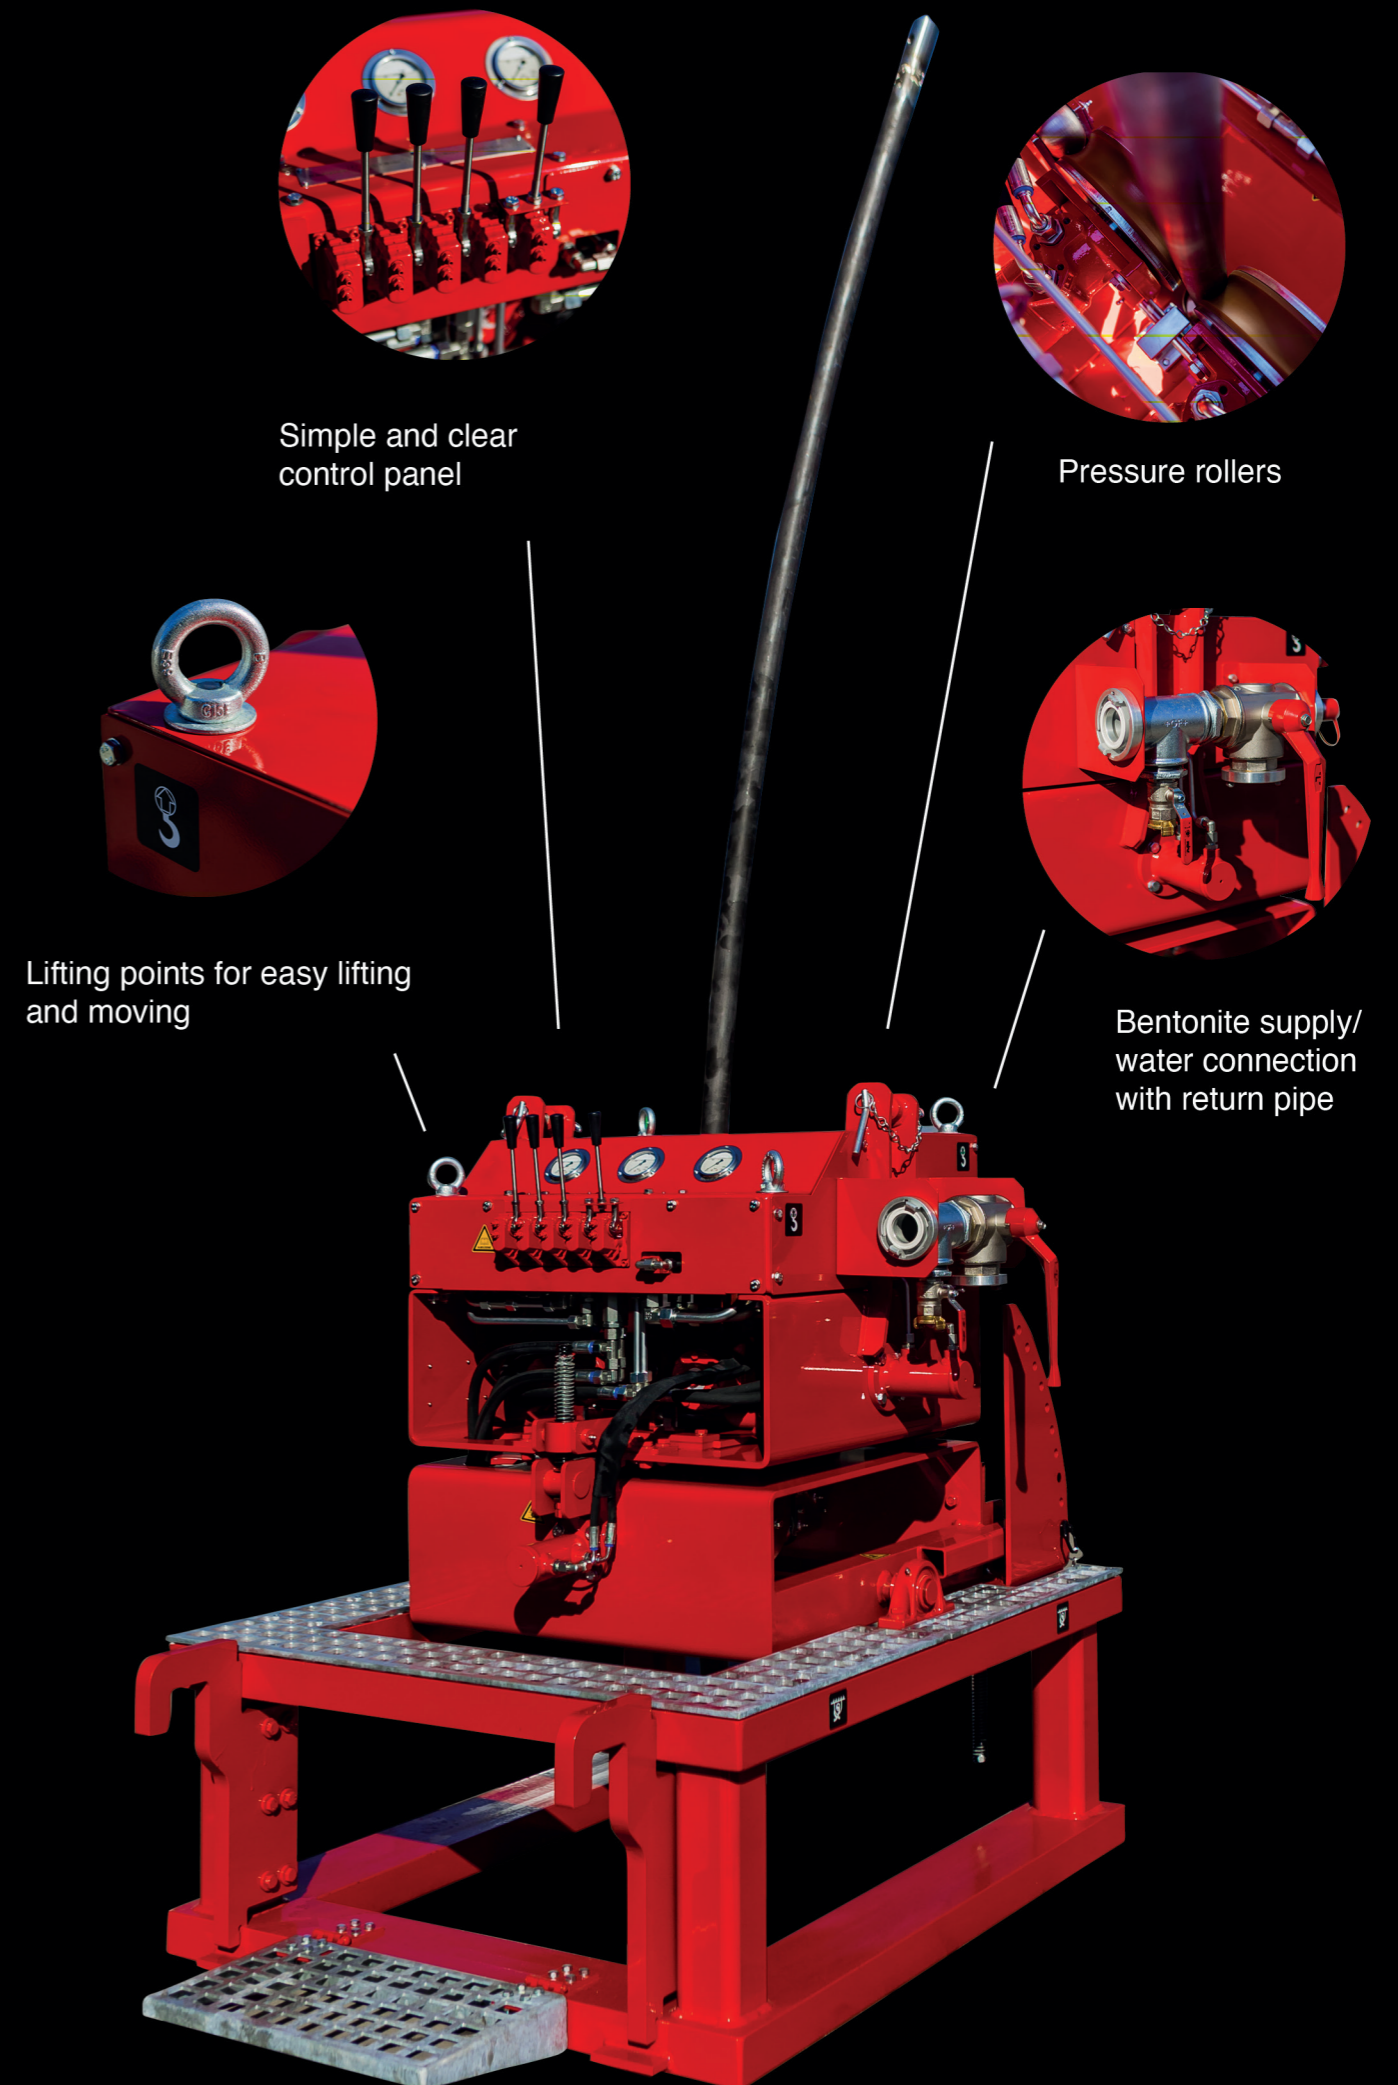

Simple and clear control panel

Pressure rollers

Lifting points for easy lifting and moving

Bentonite supply/water connection with return pipe